

# VOYAGER™ XP 1470G & 1472G

Durable, Highly Accurate 2D Scanner

---

Accessories Guide

---



**Honeywell**

# **TABLE OF CONTENTS**

- 3 Battery and battery chargers
- 3 Access points, communication base and charger
- 4 Power supplies for cabled connections and charge/  
communication bases
- 5 Cables/stands

# BATTERY AND BATTERY CHARGERS



BAT-SCN01A

### Battery Pack

Battery: Lithium-ion battery for Voyager™ 1202g and 1472g wireless scanners.



MB4-BAT-SCN01XXD06<sup>1</sup>

### 4-Bay Battery Charger-Desk Mount

4-bay battery charger for use with Granit, Xenon and Voyager Lithium-ion batteries, desktop power supply, two mounting screws (100006897), and instructions (MBC-INST).



MB4-BAT-SCN01XXW06<sup>1</sup>

### MB4-BAT-SCN01XXW06

4-bay battery charger for use with Granit, Xenon and Voyager lithium-ion batteries, wall mount power supply, two mounting screws (100006897), and instructions (MBC-INST).

# ACCESS POINTS, COMMUNICATION BASE AND CHARGER



AP-100BT-07N

### Bluetooth® Access Point

Access point for scanners. Class 1 Bluetooth, 100m(330'), RS232/USB/KBW/IBM (cable sold separately).



AP-010BT-07N

### Bluetooth Access Point

Access point for scanners. Class 2 Bluetooth, 10m (33'), RS232/USB/KBW/IBM (cable sold separately).



CCB01-010BT-V1N

### Voyager Charge and Communication Base

Charge & Communication, Bluetooth, Typical 10m, 1 scanner can be connected, RS232/USB/KBW/IBM host interfaces (cables sold separately).



COB01

### Charge Only Base

Charge-Only Base: Only 1 scanner can be charged at a time, power supply must be purchased separately.

<sup>1</sup> Indicates characters designating regional configuration

# POWER SUPPLIES FOR CABLED CONNECTIONS AND CHARGE/COMMUNICATION BASES



46-00525-6

## Power Supply – NA Plug

Power Supply: NA plug,  
1.0A @ 5.2V DC, 90-  
255V AC @ 50-60Hz.



46-00526

## Power Supply – EU Plug

Power Supply: EU plug,  
1.0A @ 5.2V DC, 90-  
255V AC @ 50-60Hz.



46-00528

## Power Supply – AU Plug

Power Supply: AU plug,  
1.0A @ 5.2V DC, 90-  
255V AC @ 50-60Hz.



46-00529

## Power Supply – CN Plug

Power Supply: CN plug,  
1.0A @ 5.2V DC, 90-  
255V AC @ 50-60Hz.



46-00526-6-I

## Power Supply – IN Plug

Power Supply: India plug,  
1.0A@5.2V DC, 90-  
255V AC @50-60Hz.




PS-05-1000W-G


## Power Supply - Type G (UK) Plug

Power Supply:  
Type G (UK) plug,  
1.0A@5.2V DC, 90-  
255V AC @ 50-60Hz.

Power supplies for cabled connections

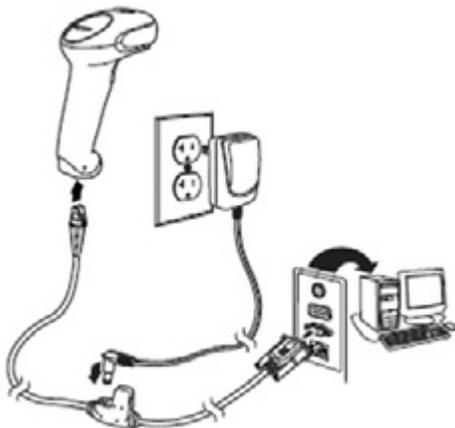

Power supplies for charge/communication bases

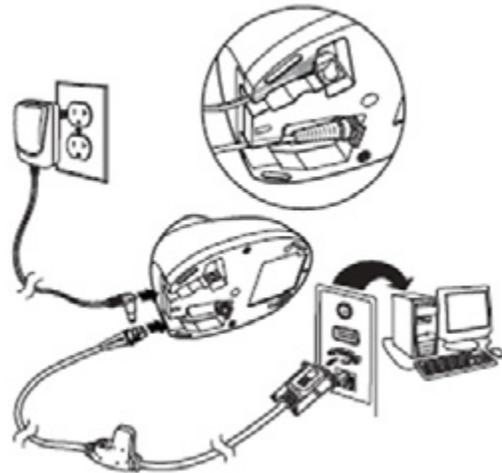

# CABLES

<p>CBL-020-300-C00</p> <p>Cable: RS232(5V signals), black, DB9 Female, 3m (9.8'), coiled, 5V external power with option for host power on pin 9, w/o ferrite.</p>	<p>CBL-020-500-C00</p> <p>Cable: RS232(5V signals), black, DB9 Female, 5m (16'), coiled, 5V external power with option for host power on pin 9, w/o ferrite.</p>	<p>CBL-500-150-S00</p> <p>Cable: USB, Black, Type A, 1.5m(4.9'), Straight, 5V host power, w/o ferrite.</p>	<p>CBL-500-300-S00</p> <p>Cable: USB, black, Type A, 3m (9.8'), Straight, 5V host power, w/o ferrite.</p>	<p>CBL-500-300-C00</p> <p>Cable: USB, black, Type A, 3m (9.8'), coiled, 5V host power, w/o ferrite.</p>
<p>CBL-500-500-C00</p> <p>Cable: USB, black, Type A, 5m (16.4'), coiled, 5V host power, w/o ferrite.</p>	<p>CBL-500-500-S00</p> <p>Cable: USB, black, Type A, 5m (16.4'), straight, 5V host power, w/o ferrite.</p>	<p>CBL-500-400-C00-01</p> <p>Cable: USB, black, Type A, 4m (13.1'), coiled, 5V host power, w/o ferrite.</p>	<p>CBL-503-300-C00</p> <p>Cable: USB, black, 12 locking type, 3m (9.8'), coiled, 5V host power, w/o ferrite.</p>	<p>CBL-503-300-S00</p> <p>Cable: USB, black, 12 locking type, 3m (9.8'), straight, 5V host power, w/o ferrite.</p>
<p>CBL-503-500-C00</p> <p>Cable: USB, black, 12 locking type, 5m (16.4'), coiled, 5V host power, w/o ferrite.</p>	<p>CBL-800-300-C00</p> <p>Cable: USB, Type C, black, 3m (9.8'), coiled, 5V host power, w/o ferrite.</p>	<p>CBL-720-300-C00</p> <p>Cable: KBW, black, PS2, 3m (9.8'), coiled, 5V external power with options for host power, w/o ferrite.</p>		

# STANDS



STND-15F03-009-6

### Voyager™ XP 1470g Stand

Stand: gray, 15cm (6 ") height, flexible rod, medium oval weighted base, Voyager 1250g/1470g cup.



STND-15R00-009-6

### Voyager XP 1470g Stand (Rigid)

Stand: gray, 6in, rigid, cradle, 1470g.



HOLDER-009-U

### Voyager Holder

Holder: Desk or wall holder, for Voyager 1250g and 1470g, 30,82.

## For more information

automation.honeywell.com

## Honeywell Industrial Automation

9680 Old Baires Road  
Fort Mill, SC 29707  
800-582-4263  
www.honeywell.com

Granit, Voyager, and Xenon are trademarks or registered trademarks of Honeywell International Inc.

Bluetooth is a trademark or registered trademark of Bluetooth SIG, Inc. All other trademarks are the property of their respective owners.

Voyager XP 1470g & 1472g 2D Scanner AG\_LTR | Rev C | 05/24  
© 2024 Honeywell International Inc.